

WHY BIBOBLOCK?



RETURN ON INVESTMENT

Following the one-off investment to purchase the BiboBlock, the system can be endlessly used and reused.



DURABLE & PERMANENT

The lifecycle of the BiboBlock is at least equivalent to that of the building on which it is installed. Following renovation of the building, the BiboBlock can be reused.



FOCUS ON SAFETY

It is the first system including attachment that has been tested for application as a construction product and that satisfies all the requirements imposed by the European standards. The system has been in use in Europe for more than 15 years.




LOW MAINTENANCE

The BiboBlock requires no more than a visual inspection once every 5 years.

EFFICIENT

Up to 3 people can secure themselves at any one time on a single BiboBlock.

It can also be used as the basis for multiple fall protection systems including line systems and rail systems.

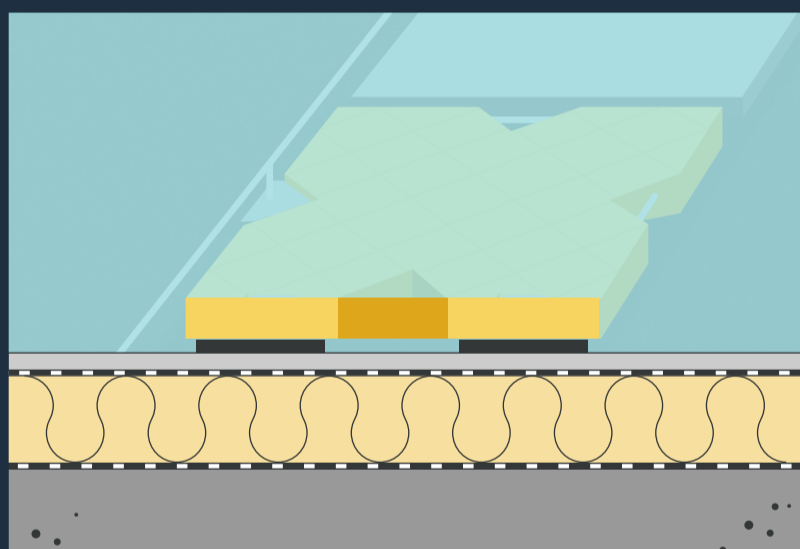

NO ROOF PENETRATION

The only fall protection system intended for flat roofs that requires no penetration of the roof structure or roof covering.




No leaks




No penetration



No thermal bridges

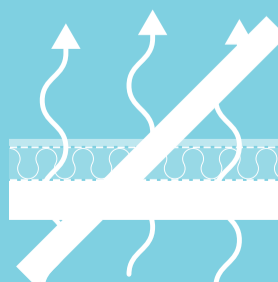

No air leaks

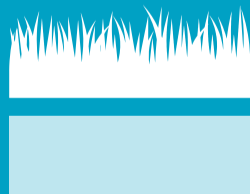

Roof planting



With/without ballast layer

BROAD APPLICATION


The BiboBlock can be used on practically all roof covering systems, and on flat roofs, in combination with planting, paving and on roofs with or without a ballast layer.



Rapid



Simple

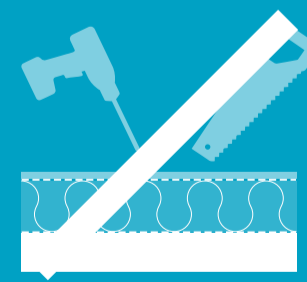

No anchoring on the subsurface



No noise nuisance

SIMPLE INSTALLATION

Depending on the nature of the roof covering, the BiboBlock is either heat bonded or glued to the roof. No anchoring to the substructure is required, so the BiboBlock is even suitable for renovation projects.